



iDOL 63 Cloud Gateway

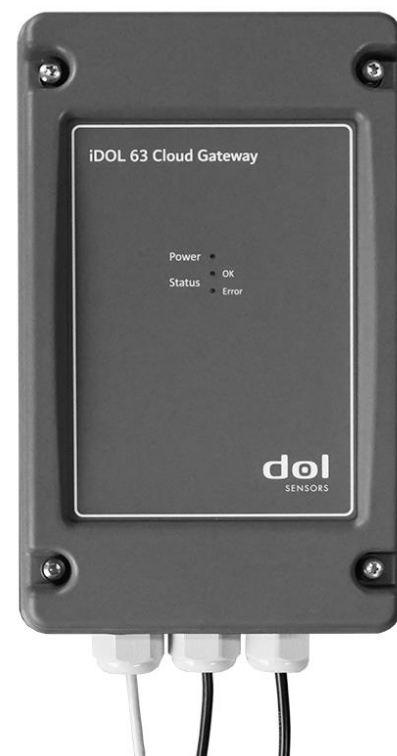

The iDOL 63 Cloud Gateway collects data from the attached dol sensors and sends these data to the DOL Omni Cloud.

The sensor data can be viewed either in an internet browser on the DOL Omni web-page or through any supported farm management.

The iDOL 63 must be installed by a skilled installer according to the provided guidelines and must be registered correctly for use with the DOL Omni or a supported farm management system.

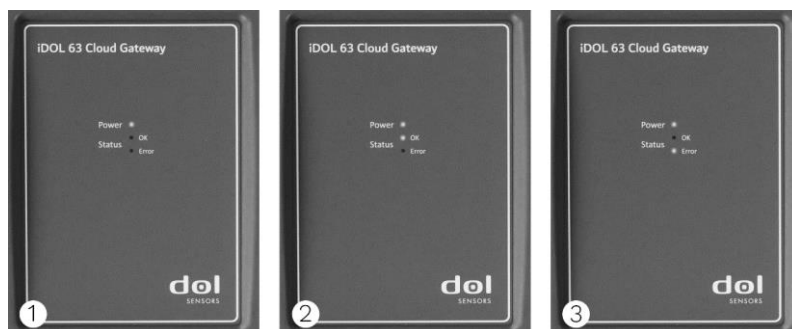

Front LEDs

TECHNICAL DATA

| | | |
|---------------------------------------|--|--------------|
| Supply Voltage | 85 – 264VAC | 120 – 370VDC |
| Supply Frequency | 47 – 63Hz | |
| Supply Current | 50 mA | |
| Ambient temperature, operation | 0°C – 50°C | |
| Ambient temperature, storage | -20°C – 60°C | |
| Ambient humidity, operation | 10 - 90%RH | |
| Classification | IP 54 | |
| Connection | Power: 3 x 0.75mm ² /AWG 18 | LAN: CAT5e |
| Weight | 1500 g | |
| Dimensions | H x W x D: 120 x 162 x 261 mm | |
| Dimensions, shipment | H x W x D: 165 x 230 x 310 mm | |